



Overview

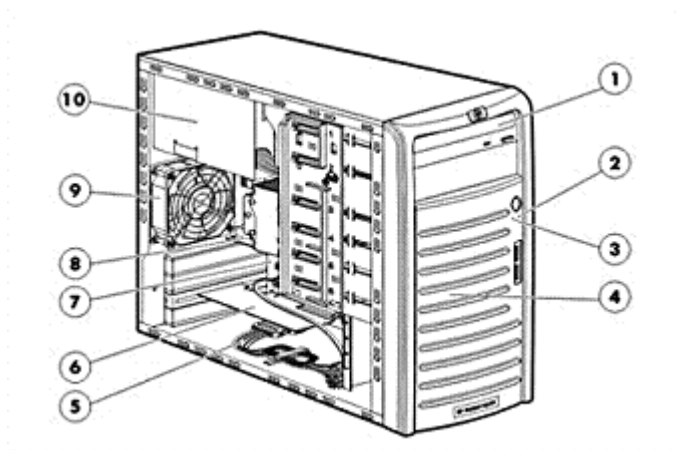

Front View:

1. DVD-ROM Drive
2. Power LED
3. Drive Activity LED
4. Front Bezel
5. SAS Cable (SAS model only)
6. Hard Drive Controller Card (Optional)
7. System Board
8. HP ProLiant 100 G5 Lights-Out 100c Management Card Port (Optional)
9. System Fan
10. 365W Power Supply

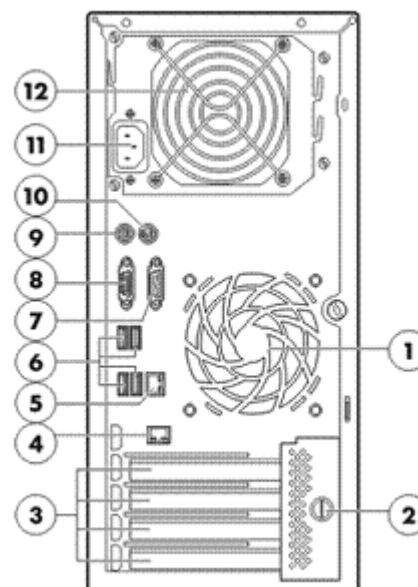

Rear View:

1. Rear System Fan
2. PCI Slot Cover Retainer
3. PCI Slot Covers
4. HP ProLiant 100 G5 Lights-Out 100c Management Card Port (Optional)
5. LAN Port (RJ-45)
6. Rear USB 2.0 Ports
7. Serial Port
8. VGA Port
9. PS/2 Keyboard Port
10. PS/2 Mouse Port
11. Power Supply Outlet
12. Power Supply Unit (PSU) Fan

What's New

The HP ProLiant ML110 G5 is now available with higher performance processors (quad-core up to 3.0GHz and dual-core up to 3.16GHz) resulting in better processing power and increased productivity for the growing businesses.

- Support for SATA Non-Hot Plug Entry and Midline Hard Drives

At A Glance

- Processor:
 - Intel® Xeon® processor 3300 series
 - Intel® Xeon® processor 3200 series
 - Intel® Xeon® processor 3100 series
 - Intel® Core™ 2 Duo processor 7000 series

Overview

- Intel® Pentium® processor 2000 series
- Intel® Celeron® processor 400 series
- Memory:
 - Four (4) DIMM slots
 - 1GB Standard/8GB Maximum of PC2-6400 Unbuffered DDR2 ECC 800 MHz
- Storage Controller:
 - SATA Models: Integrated 6 ports SATA controller with embedded RAID (4 ports available for hard disks)
NOTE: Transfer rate: 3 Gb/s SATA.
 - SAS Models: HP SC40Ge Host Bus Adapter with RAID 0, 1 support, FIO
NOTE: When using the SC40Ge with SATA hard drives, 1.5G SATA hard drives are required.
NOTE: Transfer rate: 3 Gb/s SATA.
- Internal Drive Support:
 - 4 HDD Support:
 - Internal SAS storage capacity of up to 1.8TB (4 x 450GB 3.5" SAS drives)
 - Internal SATA storage capacity of up to 8.0TB (4 x 2TB 3.5" SATA drives)
- Network Controller:
 - Embedded NC105i PCI Express Gigabit Ethernet Server Adapter
- Expansion Slots:
 - Slot 1: PCI 32-bit/33MHz at 3.3V
 - Slot 2: PCI-Express x8 connector with x1 link
 - Slot 3: PCI-Express x8 connector with x1 link
 - Slot 4: PCI-Express x8 connector with x8 link
- USB 2.0 Ports:
 - Eight (8) USB 2.0: 2 front, 4 rear, 2 internal (one for tape, one for standard USB device)
- Management:
 - Standard Lights Out 100 IPMI 2.0 reporting
 - Optional HP ProLiant 100 G5 Lights Out 100c Remote Management Card
 - Standard HP ProLiant ML110 G5 Easy Set-up CD
- Form Factor:
 - Micro ATX tower (4U)
- Warranty:
 - This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and repair are available for one year from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
NOTE: Server Warranty includes 1 year parts, 1 year labor, 1-year on-site support with next business day response. (3-1-1 warranty offered in AP only, excluding Japan). Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

Standard Features

Processor

One of the following depending on Model

Quad-Core Processors

Intel® Xeon® processor X3370 (3.00 GHz, 95W, 1333MHz FSB, 12MB)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Xeon® processor X3360 (2.83 GHz, 95W, 1333MHz FSB, 12MB)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Xeon® processor X3330 (2.66 GHz, 95W, 1333MHz FSB, 6MB)

Intel® Xeon® Processor X3220 (2.40 GHz, 95W, 1066MHz FSB, 8MB)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Xeon® Processor X3210 (2.13 GHz, 95W, 1066MHz FSB, 8MB)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Dual-Core Processors

Intel® Xeon® processor E3120 (3.16 GHz, 65W, 1333MHz FSB, 6MB)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Xeon® processor E3110 (3.00 GHz, 65W, 1333MHz FSB, 6MB)

Intel® Core™ 2® processor E7400 (2.80 GHz, 65W, 1066MHz FSB, 3MB)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Intel® Pentium® processor E2160 (1.80 GHz, 65W, 800MHz FSB, 1MB)

Single-Core Processors

Intel® Celeron® processor 440 (2.0 GHz, 35W, 800MHz FSB, 512KB)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Cache Memory

One of the following depending on Model

12 MB Level 2 cache - Xeon X3370, X3360

8 MB Level 2 cache - Xeon X3220, X3210

6 MB Level 2 cache - Xeon X3330, E3120, E3110

3 MB Level 2 cache - Core2 E7400

1 MB Level 2 cache - Pentium E2160

512KB Level 2 cache - Celeron 440

Chipset

Intel® 3200

Memory Protection

ECC

Standard Features

Memory	Type	PC2-6400 unbuffered DDR2 ECC 800MHz
	Standard	1 GB
	Maximum	8 GB

Network Controller	Embedded NC105i PCI Express Gigabit Ethernet Server Adapter
--------------------	---

Expansion Slots #	Technology	Bus Width***	Connector Width	Bus Number*	Device Number**	Form Factor	Notes
1	PCI	32-bit	N/A	0	30	Full height slot	33MHz/3.3V
2	PCIe	X1	X8	0	28	Full height slot	
3	PCIe	X1	X8	2	28	Full length, full height slot	
4	PCIe	X8	X8	0	1	Full length, full height slot	

*Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

** Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

*** Indicates the number of physical electrical lanes running to a PCI-e connector.

NOTE: PCI-X Interface (PCI 32bit/33MHz compatible)

Storage Controller	SATA Models	Integrated 6 ports SATA controller with embedded RAID (4 ports available for Hard Disks) NOTE: Transfer rate: 3 Gb/s SATA.
--------------------	-------------	---

Storage	Optical Drive	SATA DVD-ROM Drive
	Hard Drives	(SATA Model only) 160GB SATA 7200 rpm Drive

Maximum Internal Storage	Type	
	Non-Hot Plug SAS	1.8TB (4 x 450GB)
	Non-Hot Plug SATA	8.0TB (4 x 2TB)

Standard Features

Interfaces	Parallel	0
	Serial	1
	Pointing Device (Mouse, PS2)	1
	Graphics	1
	Keyboard (PS2)	1
	USB 2.0 Ports	8 total (4 rear, 2 front panel, 2 internal (one for USB Tape connectivity))
		NOTE: Please see the following URL for additional information regarding USB support: http://h18004.www1.hp.com/products/servers/platforms/usb-support.html
	Network RJ-45 (Ethernet)	1
	Management	HP ProLiant 100 G5 Lights-Out 100c Remote Management port (Optional)

Graphics 32MB shared supporting 1600 x 1200 x 16M resolution

Form Factor Micro ATX Tower (4U)

Remote Management Lights-Out 100c Lights Out LO100c is a Remote Management Card (RMC) for ProLiant 100 series servers that do not have embedded LO100i. The LO100c has all the features of the LO100i Advanced license and allows customers, or their service providers, to remotely manage ProLiant servers over a LAN or the Internet from anywhere, anytime regardless whether the server is located in the same building, across town, or around the globe.

With LO100c, users can acquire complete remote control with Virtual KVM (graphical hardware-based, remote console). Users can also access the server's serial console, control system power, update system firmware and software, as well as monitor system environmental conditions. The LO100c remote management card can be accessed from a web browser or command line interface. This virtual "at-the-server" functionality means administrators stay in control of remote HP ProLiant 100 series servers. The HP Lights-Out100c consists of a management processor and firmware that provides cost-effective, entry-level lights-out functionality, basic system board management functions, and diagnostics.

NOTE: For more information, please refer to the QuickSpecs for the LO100c found at: <http://h18004.www1.hp.com/products/servers/management/remotemgmt/lightsout100/index.html>

Standard Features

Core Infrastructure Management

HP ProLiant ML110 G5 Easy Set-up CD

The HP ProLiant Easy Set-up CDs optimize single-server setup, providing a simple way to deploy reliable and consistent server configurations. The HP ProLiant 100 Series Easy Set-up CD ship standard with the ML110 G5.

It offers essential single-server deployment tools for HP ProLiant 100 series servers that simplify HP entry server setup, providing a repeatable way to deploy reliable and consistent single-server configurations. The HP ProLiant Easy Set-up CDs assist with the OS installation process by preparing the system for installing "off-the-shelf" versions of Windows operating system software and automatically integrating optimized HP ProLiant server software drivers and utilities. Users enjoy the following benefits:

- An easy-to-use, intuitive graphical interface that prepares your system for the OS installation process.
- Integration of key server software drivers with assisted installation.
- Dependency and validity checks to ensure that all supported ProLiant software can be installed.

NOTE: For the latest information about other related software; please visit the HP Insight Control Management Software Portfolio at:

<http://h18004.www1.hp.com/products/servers/management/> and the HP ProLiant Easy Set-up CD Web site at: www.hp.com/servers/easysetup

Industry Standard Compliance

ACPI V3.0a Compliant
PCI 2.3 Compliant
PXE Support
WOL Support
IPMI 2.0 compliance
Microsoft® Logo certifications
RedHat Enterprise Linux Logo certifications
SUSE Linux Enterprise Server Logo certifications
USB 2.0

Manageability

Standard Lights Out 100 IPMI 2.0 reporting
Optional HP ProLiant 100 G5 Lights-Out 100c Remote Management Card
Standard HP ProLiant ML110 G5 Easy Set-Up CD

Security

Power-on password
Setup password
USB lock

Server Power Cords

6' country specific, lowline NEMA power cord.



Standard Features

Power Supply 365 Watts

System Fans 1 – non-redundant system fan shipped standard
1 – non-redundant CPU heatsink fan shipped standard

Operating Systems and Virtualization Software [Microsoft Windows Server](#)
[Red Hat Enterprise Linux \(RHEL\)](#)
Support for ProLiant Servers [SUSE Linux Enterprise Server \(SLES\)](#)
[Netware](#)

NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hp.com/go/supportos> and our driver download page <http://www.hp.com/support/ML110G5>

Factory Express Portfolio HP Factory Express offers configuration, customization, integration and deployment services for HP servers for Servers and Storage and/or storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging and custom packaging HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers, as well as, the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to <http://www.hp.com/go/factory-express>.

HP Enterprise Configuration The HP eConfigure Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance. <http://www.hp.com/products/configurator>.

Standard Features

- Service and Support** HP Care Pack Services provide total care and support expertise with committed response designed to meet your IT and business needs.
- HP Care Pack services include coverage for the HP branded hardware options qualified for the server that are purchased at the same time or afterward and internal to the enclosure. It also includes the 22" and smaller external monitors and tower UPS options up to 3kVA. These items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included and standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.
- To fully capitalize on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions provides a range of support services designed to meet the varying needs of business. Whether an SMB or large global corporation HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.
- Recommended Service – Simplify ProLiant solution implementation, maintenance and management.
- Support Service – 3 Year, 9x5 Next Business Day coverage, excluding HP holidays only
 - Deployment Service – Hardware Installation only
- Enhanced Service – Optimize service level to increase IT performance and availability
- Support Service – 3 Year 13x5 Same Business Day, 4-Hour response coverage
 - Deployment Service – Installation and Start-up only
- Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays.
- For a complete listing of service offerings and information visit:
<http://www.hp.com/services/proliantservices>
<http://h20219.www2.hp.com/services/us/en/warranty/carepack-servers-proliant.html>

Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see "Configuration Information - Factory Integrated Models" section.

SATA Models

HP ML110 G5 X3330 NHP-SATA 495124-xx1	Processor(s)	(1) Intel® Xeon® processor X3330 (2.66 GHz, 95W, 1333MHz FSB, 6MB)
	Cache Memory	6MB (2 x 3MB) Level 2 cache
	Memory	1GB PC2-6400 UB ECC (DDR2-800MHz) (1 x 1GB)
	Storage Controller	HP Embedded 6 Port SATA Controller with Embedded RAID (4 ports for HDD)
	Hard Drive	1 x 160GB 3.5-inch Non-hot-plug LFF SATA
	Internal Storage	Non-Hot Plug LFF SATA: Maximum 8.0TB (4 x 2TB)
	Optical Drive	Half-Height 16x SATA DVD-ROM
	Form Factor	Micro ATX Tower (4U)

HP ML110 G5 E3110 NHP SATA 533548-xx1	Processor(s)	(1) Intel® Xeon® processor E3110 (3.00 GHz, 65W, 1333MHz FSB, 6MB)
	Cache Memory	6MB (2 x 3MB) Level 2 cache
	Memory	1GB PC2-6400 UB ECC (DDR2- 800 MHz) (1x1GB)
	Storage Controller	HP Embedded 6 Port SATA Controller with Embedded RAID (4 ports for HDD)
	Hard Drive	1 x 160GB 3.5-inch Non-hot-plug LFF SATA
	Internal Storage	Non-Hot Plug LFF SATA: Maximum 8.0TB (4 x 2TB)
	Optical Drive	Half-Height 16x SATA DVD-ROM
	Form Factor	Micro ATX Tower (4U)

HP ML110 G5 Pentium E2160 NHP-SATA 444809-xx1	Processor(s)	(1) Intel® Pentium® processor E2160 (1.8GHz, 65W, 800MHz FSB, 1MB)
	Cache Memory	1MB (1 x 1MB) Level 2 cache
	Memory	1GB PC2-6400 UB ECC (DDR2-800MHz) (1 x 1GB)
	Storage Controller	HP Embedded 6 Port SATA Controller with Embedded RAID (4 ports for HDD)
	Hard Drive	1 x 160GB 3.5-inch Non-hot-plug LFF SATA
	Internal Storage	Non-Hot Plug LFF SATA: Maximum 8.0TB (4 x 2TB)
	Optical Drive	Half-Height 16x SATA DVD-ROM
	Form Factor	Micro ATX Tower (4U)

Models

Country Code Key	xx=00	NA
	xx=01	Australia (Excluding P/N 533548-xx1)
	xx=03	UK
	xx=04	Germany
	xx=05	France
	xx=20	Brazil (Excluding P/N 533548-xx1)
	xx=29	Japan (Excluding P/N 533548-xx1)
	xx=37	AP
	xx=42	Euro
	xx=AA	PRC

Configuration Information-Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order servers must start with a CTO Chassis.

NOTE: FIO indicates that this option is a Factory Installable Option.

Step 1: Base Configuration

Models	<p>HP ProLiant ML110G5 NHP CTO Chassis 445607-B21</p> <p>Factory Integrated Models ship with:</p> <p>Embedded NC105i PCI Express Gigabit Ethernet Server Adapter</p> <p>Keyboard and Mouse</p> <p>NOTE: Keyboard and Mouse option needs to be manually selected for shipment. Please see the USB Options listed in the options selection of this QuickSpecs.</p> <p>Power cord</p> <p>Micro ATX Tower (4U)</p> <p>NOTE: HP SATA drive models are limited to 4.0TB support.</p> <p>NOTE: On SATA models with embedded RAID, setup instructions are located in the User Guide. CTO RAID set-up is not available. HP ProLiant ML100 Series Server User Guide:</p> <p>http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00260539/c00260539.pdf</p>
--------	--

Step 2: Choose Required Options (only one of the following from each list unless other noted)

HP Processors	<p>Quad-Core Processor</p> <p>Intel® Xeon® processor X3370 (3.00GHz, 95W, 1333MHz FSB, 12MB), FIO 535026-L21</p> <p>Intel® Xeon® processor X3360 (2.83GHz, 95W, 1333MHz FSB, 12MB), FIO 493261-L21</p> <p>Intel® Xeon® processor X3330 (2.66 GHz, 95W, 1333 MHz FSB, 6MB), FIO 493259-L21</p> <p>Intel® Xeon® Processor X3220 (2.40 GHz, 95W, 1066 MHz FSB, 8MB), FIO 455069-L21</p> <p>Intel® Xeon® Processor X3210 (2.13 GHz, 95W, 1066 MHz FSB, 8MB), FIO 455068-L21</p> <p>Dual-Core Processor</p> <p>Intel® Xeon® processor E3120 (3.16 GHz, 65W, 1333 MHz FSB, 6MB), FIO 492973-L21</p> <p>Intel® Xeon® processor E3110 (3.00 GHz, 65W, 1333 MHz FSB, 6MB), FIO 464376-L21</p> <p>Intel® Core™ 2® processor E7400 (2.80 GHz, 65W, 1066MHz FSB, 3MB), FIO 533838-L21</p> <p>Intel® Pentium® processor E2160 (1.8GHz, 65W, 800 MHz FSB, 1MB), FIO 450359-L21</p> <p>Single-Core Processor</p> <p>Intel® Celeron® processor 440 (2.0GHz, 35W, 800 MHz FSB, 512KB), FIO 455072-L21</p>
---------------	--

Configuration Information-Factory Integrated Models

HP Memory	HP 2GB (1x2GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit	450260-B21	
	HP 1GB (1x1GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit	450259-B21	
HP Optical Drives	HP Half-Height SATA DVD ROM Kit	447326-B21	
	HP Half-Height SATA DVD-RW Optical Kit	447328-B21	
HP Hard Drives	<p>NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, and firmware) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.</p> <p>NOTE: Hard drives have either a one year or three year warranty; please refer to the specific hard drive QuickSpecs for details.</p> <p>NOTE: Supports up to 4 hard drives.</p> <p>SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives</p> <p>HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive</p>		507774-B21
	HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive	507772-B21	
	HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive	458941-B21	
	SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives		
	HP 250GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Entry 1yr Warranty Hard Drive	571232-B21	
	HP 160GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Entry 1yr Warranty Hard Drive	458947-B21	
	<p>NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18004.www1.hp.com/products/quickspecs/13021_div/13021_div.html (Worldwide)</p>		
	SAS Non-Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives		
	HP 450GB 3G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	454234-B21	
	HP 300GB 3G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	417950-B21	
	HP 146GB 3G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	417855-B21	

Step 3: Choose Additional Options for Factory Integration

HP Storage Controller	HP SC40Ge SAS HBA, FIO	449176-B21
-----------------------	------------------------	------------

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional "Core Options" and "Additional Options", please refer to the "Options" sections below.



Core Options

NOTE: Some options may not be factory integratable. Please contact your local sales representative for additional information.

HP Memory	HP 2GB (1x2GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit	450260-B21
	HP 1GB (1x1GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit	450259-B21

HP Optical Drives	HP Half-Height SATA DVD ROM Kit	447326-B21
	HP Half-Height SATA DVD-RW Optical Kit	447328-B21

HP Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, and firmware) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; please refer to the specific hard drive QuickSpecs for details.

SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive	507774-B21
---	------------

HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive	507772-B21
---	------------

HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive	458941-B21
---	------------

SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives

HP 250GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Entry 1yr Warranty Hard Drive	571232-B21
---	------------

HP 160GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Entry 1yr Warranty Hard Drive	458947-B21
---	------------

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html (Worldwide)

SAS Non-Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

HP 450GB 3G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	454234-B21
--	------------

HP 300GB 3G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	417950-B21
--	------------

HP 146GB 3G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	417855-B21
--	------------

NOTE: Please see the for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html (Worldwide)

Core Options

HP Networking	HP NC110T PCI Express Gigabit Server Adapter	434905-B21
	HP NC360T PCI Express Dual Port Gigabit Server Adapter	412648-B21
	HP NC373T PCI Express Multifunction Gigabit Server Adapter	394791-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs

Additional Options

HP Entry Level Server Management	<p>HP ProLiant ML100 G5 Lights-Out 100c Remote Management Card</p> <p>NOTE: Supports HP ProLiant DL180 G5, ML110 G5, ML115 G5 and ML150 G5 servers.</p> <p>NOTE: For additional information on Lights-Out 100c Remote Management Card, please see the QuickSpecs at:</p> <p>http://h18000.www1.hp.com/products/quickspecs/12468_div/12468_div.html</p>	445513-B21
----------------------------------	---	------------

HP Storage Controllers SAS Controllers

Smart Array E200 Controller	HP Smart Array E200/128 BBWC Controller	411508-B21
	NOTE: Supports RAID 0,1,1+0, 5/BBWC.	

Optional Upgrades

HP Non-Hot Plug SAS/SATA 4-Port Cable Kit	NOTE: The purchase of a SAS Storage Controller requires the purchase of HP SAS/SATA 4-Port Cable (P/N 457692-B21).	457692-B21
---	--	------------

NOTE: SAS Storage Controllers supports both SATA and SAS drives.

NOTE: On SATA models with embedded RAID, setup instructions are located in the User Guide. CTO RAID set-up is not available. HP ProLiant ML100 Series Server User Guide:

<http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00260539/c00260539.pdf>

SAS HBA

HP SC44Ge Host Bus Adapter	NOTE: When using the SC44Ge with SATA Hard Drives, 1.5G SATA Hard Drives are required. Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS.	416096-B21
	NOTE: Supports RAID 0,1.	

SCSI HBA

HP SC11Xe U320 Host Bus Adapter	NOTE: Supports Tape only, no RAID support.	412911-B21
	NOTE: Recommended HBA for SCSI tape drive connect.	

NOTE: Please see the following QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/12460_div/12460_div.html (Smart Array E200 Controller)

http://h18004.www1.hp.com/products/quickspecs/12617_div/12617_div.html (SC44Ge HBA)

http://h18004.www1.hp.com/products/quickspecs/12566_div/12566_div.html (SC11Xe HBA)

Additional Options

Backup & Recovery Software	Data Protector Express	
	HP Data Protector Express 4.0 SP1 Backup Server	BB117BA
	HP Data Protector Express 4.0 SP1 for Microsoft Small Business Server	BB118BA
	HP Data Protector Express Backup Server 4.0 SP1 Upgrade from Data Protector Express Single Server Edition	BB117BT
	NOTE: Only one of these Data Protector Express base products is required. To see available options: http://www.hp.com/go/dataprotectorexpress	

Tape Backup	NOTE: For the complete range of StorageWorks tape drives, autoloaders, libraries and media see: http://www.hp.com/go/tape . For hardware and software compatibility of HP StorageWorks tape backup products see: http://www.hp.com/go/connect .	
	HP StorageWorks DAT 320 USB Internal Tape Drive	AJ825A
	HP StorageWorks DAT 320 SAS Internal Tape Drive	AJ830A
	NOTE: Connection using the HP SC44Ge SAS Host Bus Adapter (416096-B21) recommended.	
	HP StorageWorks LTO-2 Ultrium 448 SAS Internal Tape Drive	DW085A
	NOTE: Connection using the HP SC44Ge SAS Host Bus Adapter (416096-B21) recommended.	
	HP StorageWorks LTO-3 Ultrium 920 SAS Internal Tape Drive	EH847A
	NOTE: Connection using the HP SC44Ge SAS Host Bus Adapter (416096-B21) recommended.	
	HP StorageWorks 1/8 G2 LTO-3 Ultrium 920 SAS Tape Autoloader	AH558A
	NOTE: Requires HP 1U Tape Autoloader Rack-Mount Kit (AH166A) for rack installation. Connection using the HP SC44Ge SAS Host Bus Adapter (416096-B21) recommended.	
	HP StorageWorks MSL2024 Tape Library with one LTO-3 Ultrium 920 SAS Drive	AH559A
	NOTE: Connection using the HP SC44Ge SAS Host Bus Adapter (416096-B21) recommended.	

Disk Backup	NOTE: For the complete range of StorageWorks D2D Backup Systems see: http://www.hp.com/go/d2d . For the complete range of StorageWorks RDX drives and media see: http://www.hp.com/go/rdx . For hardware and software compatibility of HP StorageWorks disk backup products see: http://www.hp.com/go/connect .	
	USB Removable Media RDX Disk Backup Systems	
	HP StorageWorks RDX320 Internal Removable Disk Backup System	AJ767A
	NOTE: 320GB of disk capacity per data cartridge.	
	HP StorageWorks RDX500 Internal Removable Disk Backup System	AJ934A
	NOTE: 500GB of disk capacity per data cartridge.	
	HP StorageWorks RDX750 Internal Removable Disk Backup System	AW577A
	NOTE: 750GB of disk capacity per data cartridge.	

Additional Options

HP Uninterruptible Power Systems	HP Tower UPS	
	HP T1000 G3 UPS Models	
	HP T1000 G3 UPS, INTL	AF449A
	HP T1000 G3 UPS, NA	AF448A
	HP T1500 G3 UPS Models	
	HP T1500 G3 UPS, NA	AF450A
	HP T1500 G3 UPS, INTL	AF451A
	HP T1500J UPS, Japan	AF458A
	HP T750 G2 UPS Models	
	HP T750 G2 UPS, INTL	AF447A
	HP T750 G2 UPS, NA	AF446A
	NOTE: Please see QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13160_div/13160_div.html	
	HP T1000 G2 UPS	
	HP T1000J UPS, Japan	AF457A
	NOTE: Please see QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12506_div/12506_div.html	
	HP T750 UPS	
	HP T750J UPS	AF456A
	NOTE: Please see QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12192_div/12192_div.html	
	NOTE: For additional information on sizing your server, please reference: http://www.upsSizer.com	

HP Rack Options	HP KVM Switch Options	
	HP 1x4 Console Switch	AF611A
	HP PS2 Server Console Cable, 6 foot, 2-Pack	AF612A
	HP USB Server Console Cable, 6 foot, 2-Pack	AF613A
	NOTE: required for supporting USB peripherals.	
	NOTE: For additional information regarding KVM Switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm	
	Rack Kits	
	Monitor/Utility Shelf	253449-B21
	ProLiant Rack Enabling Kit	417705-B21

Additional Options

HP USB and SD Options	HP USB 2-Button Optical Mouse ALL	DC172B
	HP USB 04 Standard Keyboard	DT528A#xxx

HP Care Pack Services	Hardware Services Next Business Day On-Site Service	
	9-Hour x 5-Day Coverage, 3 Years, Electronic	U4433E
	Hardware Services - 4-Hour On-site Service	
	13-Hour x 5-Day Coverage, 3 Years, Electronic	U4434E
	24-Hour x 7-Day Coverage, 3 Years, Electronic	U4435E
	Hardware Services 6-Hour Call to Repair On-Site Service	
	6-Hour Call to Repair, On-Site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	U4436E
	Hardware Installation	
	Hardware Installation, Electronic	U4444E

NOTE: For more information, customer/resellers can contact:
<http://www.hp.com/services/carepack>

Memory

HP ProLiant ML110 G5 Models

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

Standard Memory

SATA Models:

1 GB of PC2-6400 DDR2 SDRAM running at 800MHz with ECC capabilities memory installed.

Standard Memory Plus Optional Memory

Up to 6 GB memory is available with the optional installation of 2 x 2 GB + 2 x 1 GB PC2-6400 un-buffered ECC DDR2 SDRAM DIMM Memory kits.

Standard Memory Replaced with Optional Memory

Up to 8GB of memory is available with the removal of the standard 1 GB of memory and the optional installation of 4x 2 GB PC2-6400 un-buffered ECC DDR2 SDRAM DIMM Memory kits.

NOTE: The below chart does not represent all possible memory configurations.


NOTE: For best performance, it is recommended that customer installs memory in identical pairs (Slots 1 and 3 are interleaving pair. Slots 2 and 4 are interleaving pair).

Memory		Slot			
		1	2	3	4
Standard	1 GB	1 GB	Empty	Empty	Empty
Optional	6 GB	1 GB	2 GB	1 GB	2 GB
Maximum	8 GB	2 GB	2 GB	2 GB	2 GB

Following are memory options available from HP:

HP Memory	HP 2GB (1x2GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit	450260-B21
	HP 1GB (1x1GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit	450259-B21

Storage

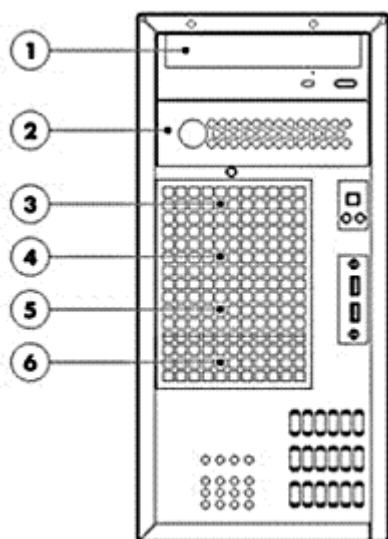

- 1 16x SATA DVD-ROM
- 2 Removable Media Bays (5.25" each)
- 3, 4, 5, Four Non-Hot Plug Drive Bays
- 6

Drive Support

	Quantity Supported	Position Supported	Controller
Removable Media			
DVD Drive	2	1 or 2	Integrated SATA
DVD-RW Drive	2	1 or 2	Integrated SATA

Hard Drives (SATA Models only)

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, and firmware) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
2TB 3G 7.2K	Up to 4	3,4,5,6	6 Port SATA controller with Embedded RAID on Motherboard NOTE: Transfer rate: 3 Gb/s SATA
1TB 3G 7.2K			
500GB 3G 7.2K			

SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives

	Quantity Supported	Position Supported	Controller
250GB 3G 7.2K	Up to 4	3,4,5,6	6 Port SATA controller with Embedded RAID on Motherboard NOTE: Transfer rate: 3 Gb/s SATA
160GB 3G 7.2K			

Hard Drives (SAS Models only)

Storage

SAS Non-Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
450GB 3G 15K DP	Up to 4	3,4,5,6	HP 4 Internal Port SAS HBA SC40Ge with RAID (0,1) <i>NOTE: When using the SC40Ge with SATA Hard Drives, 1.5G SATA Hard Drives are required.</i>
300GB 3G 15K DP			
146GB 3G 15K DP			

Maximum Storage Capacity – SATA/SAS Models

Internal	SATA	8.0TB (4 x 2TB)
	SAS	1.8TB (4 x 450GB)

Tape and Disk Backup

NOTE: For the complete range of StorageWorks tape drives, autoloaders, libraries and media, including the internal fitting models, see: <http://www.hp.com/go/tape>. For the complete range of StorageWorks D2D Backup Systems see: <http://www.hp.com/go/d2d>. For the complete range of StorageWorks RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP StorageWorks disk and tape backup products see: <http://www.hp.com/go/connect>.

	Position	Recommended Controller	Part Number
HP StorageWorks SCSI Tape Drives	Internal or External	HP SC11Xe Host Bus Adapter	412911-B21
LTO-1 Ultrium 232		Please check the full compatibility information at: http://www.hp.com/go/connect	
LTO-2 Ultrium 448			
LTO-3 Ultrium 920			
LTO-3 Ultrium 960			
LTO4 Ultrium 1760			
LTO-4 Ultrium 1840			
DAT 40			
DAT 72			
DAT 160			
HP StorageWorks SCSI Rack Mount Kits	External	HP SC11Xe Host Bus Adapter	412911-B21
1U Rack-Mount Kit		Please check the full compatibility information at: http://www.hp.com/go/connect	
3U Rack-Mount Kit			
HP StorageWorks USB Tape Drives	Internal or External	USB 2.0 Port	N/A
DAT 40			
DAT 72			
DAT 160			
DAT 320			

Storage

HP StorageWorks USB Rack Mount Kits 1U USB Rack-Mount Kit	External	USB 2.0 Port	N/A
HP StorageWorks SAS Tape Drives DAT 160 DAT 320 LTO-2 Ultrium 448 LTO-3 Ultrium 920 LTO-4 Ultrium 1760 LTO-4 Ultrium 1840 LTO-5 Ultrium 3000 LTO-5 Ultrium 3280	Internal or External	HP SC44Ge SAS Host Bus Adapter Please check the full compatibility information at: http://www.hp.com/go/connect	416096-B21
HP StorageWorks SAS Rack Mount Kits 1U Rack-Mount Kit 3U Rack-Mount Kit	External	HP SC44Ge SAS Host Bus Adapter Please check the full compatibility information at: http://www.hp.com/go/connect	416096-B21
HP StorageWorks SCSI Tape Autoloaders DAT 72x10 Autoloader 1/8 G2 Autoloader	External	HP SC11Xe Host Bus Adapter Please check the full compatibility information at: http://www.hp.com/go/connect	412911-B21
HP StorageWorks SCSI Tape Libraries MSL2024 MSL4048 MSL8096 MSL6000	External	HP U320e SCSI Dual Channel Controller Please check the full compatibility information at: http://www.hp.com/go/connect	AH627A
HP StorageWorks SAS Tape Autoloaders and Libraries 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096	External	HP SC44Ge SAS Host Bus Adapter Please check the full compatibility information at: http://www.hp.com/go/connect	416096-B21
HP StorageWorks Fibre Channel Tape Libraries MSL2024 MSL4048 MSL8096	External	Please consult the EBS connectivity matrix at: http://www.hp.com/go/ebs for connectivity information and the supported Fibre Channel HBAs shown in this QuickSpecs.	

Storage

MSL6000

HP StorageWorks USB RDX Removable Disk Backup System RDX160 RDX320 RDX500 RDX750	External	USB 2.0 port	N/A
--	----------	--------------	-----

Power Specifications

Part Number 445067-001
 Operational Input Voltage Range (Vrms) 100 to 127 and 200 to 240 V auto ranging
 Frequency Range (Nominal) (Hz) 50 to 60 Hz

Nominal Input Voltage (Vrms)	100	120	200	230	240
Max Rated Output Wattage Rating	365	365	365	365	365
Nominal Input Current (A rms)	6	N/A	3	N/A	N/A
Max Rated Input Wattage Rating (Watts)	N/A	N/A	N/A	N/A	N/A
Max. Rated VA (Volt-Amp)	600	N/A	N/A	N/A	N/A
Efficiency (%)	>65%	>65%	>65%	>65%	>65%
Power Factor	N/A	N/A	N/A	N/A	N/A
Leakage Current (mA)	N/A	<0.45mA	N/A	N/A	N/A
Maximum Inrush Current (A peak)	N/A	No component was damaged and input fuse shall not blow	N/A	No component was damaged and input fuse shall not blow	N/A
Maximum Inrush Current duration (mS)	N/A	N/A	N/A	N/A	N/A

System Specifications

	Power **
HP ProLiant ML110 G5 Fully Configured	(see **)
Fully Loaded System output Wattage (W)	365W
Fully Loaded System Input Current (Arms)	6A @ 100V, 3A @ 200V
Fully Loaded System Thermal (BTU- Hr)	1915BTU
Fully Loaded System VA (Volt-Amp)	600 VA
System Leakage with all power supplies loaded (mA)	0.45mA@120V
System Inrush Current with all power supplies loaded (A)	<150A@ 240Vac
Power cord requirements	Nema 5-15P to IEC320-C13
	IEC320-C13 to IEC320-C14
	**Power shown is for a fully configured system consisting of (1) CPU, (4) double-sided DIMMs, (4) HDDs, (1) DVD-ROM, (4) PCI cards, and (1) power supply.
Power Cords (13 Cord Sets)	Power Cord Part Number
Country	
APD	100614-009, 100613-008, 139867-005, 397138-002 (India)
Brazil	285052-001
Australia	100661-001
Euro	100614-009
France	100614-009
Germany	100614-009
Japan	139867-005
PRC	286496-001
UK	100613-008
US, Taiwan	121565-001

Technical Specifications

System Unit	Dimensions (HxWxD) (with feet)	14.5 x 6.9 x 16.8 in (36.7 x 17.5 x 42.6 cm)	
	Weight (approximate)	Maximum (all hard drives, power supplies, and processors installed)	39 lb (17.5 kg)
Minimum (one hard drive, power supply, and processor installed)		23.81 lb (10.8 kg)	
Input Requirements (per power supply)	Rated Line Voltage	90 to 132 VAC, 180 to 264 VAC	
	Rated Input Current	6 A (at 100 VAC), 3 A (at 200 VAC)	
	Rated Input Frequency	47 to 63 Hz	
	Rated Input Power	600 W (at 100 VAC), 600 W (at 200 VAC)	
Power Supply Output (per power supply)	Rated Steady-State Power	365 W (at 100 VAC), 365 W (at 200 VAC)	
	Maximum Peak Power	385 W (at 100 VAC), 385 W (at 200 VAC)	
System Inlet Temperature	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).	
	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).	
Relative Humidity (non-condensing)	Operating	10% to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non- condensing.	
	Non-operating	5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.	
Altitude	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).	

Technical Specifications

	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	SATA Model	
	Idle	
	LWAd	4.2 Bels
	LpAm	26 dBA
	Operating	
	LWAd	5.1 Bels
	LpAm	34 dBA
	SAS Model	
	Idle	
	LWAd	5.2 Bels
	LpAm	34 dBA
	Operating	
	LWAd	5.7 Bels
	LpAm	40 dBA
Emissions Classification (EMC)	FCC Rating	Class B
	Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

Technical Specifications

HP 160GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Entry 1yr Warranty Hard Drive	458947-B21	Capacity	160,041 MB
		Height	1.0 in. (26.1 mm)
		Maximum drive dimension	
		Width	4.0 in (101.6 mm)
		Depth	5.787 in (147.0 mm)
		Maximum drive dimension	
		Interface	Serial ATA
		Transfer Rate (Maximum)	3Gb/s
		Native Command Queuing	N/A
		Seek Time	Single Track 2.0 ms
		(typical reads, including settling)	Average <11 ms
			Full-Stroke 23.0 ms
			Rotational Speed 7,200 rpm
		Physical Configuration	Bytes/Sector 512
			Logical Blocks 312,581,808
		Operating Temperature	41° to 131° F (5° to 55° C)

16X Max SATA DVD-ROM Drive	Applicable Disk	CD-ROM, CD-XA, CD-DA (Mode 1, Mode 2, Form 1 and 2) Photo CD (Single and Multi-session) CD-R, CD-RW Mixed Mode (Audio and Data combined) DVD-ROM DVD-R/RW, DVD+R/RW CD-R, CD-RW, DVD-ROM, DVD+R, DVD+RW
	Capacity	4.7 GB (DVD-5) 8.54 GB (DVD-9)
	Block Size	DVD Media 2,048 bytes
	Interface	SATA
	Access Times (typical)	Random <140 ms Full-Stroke <250 ms
	Data Transfer Rate	Sustained 8100 to 21600 KB/s (6X to 16X) Bus Rate 1.5 Gbps
	Cache Buffer	128 KB
	Start-up Time (typical)	< 7 seconds
	Stop Time	< 4 seconds
	Laser Parameters	Type Semiconductor Laser GaAlAs Wave Length 780 ± 25 nm

Technical Specifications

Operating Conditions	Temperature	41° to 122° F (5° to 50° C)
	Humidity	10% to 90%
Dimensions	(HxWxD, maximum)	1.7 x 5.85 x 8.11 in (42.9 x 150 x 195 mm)
	Weight	2.64 lb (1.2 kg)

HP 4 Internal Port SAS Host Bus Adapter (SAS/SATA HP Model)	SATA Protocol	SATA 1.5Gb/s
	SATA Ports	4 internal
	Port transfer rate	1.5 Gb/s total
	Maximum Capacity	up to 4.0TB (4 x 1TB Non-Hot Plug SATA HDD)
	RAID Levels Supported	RAID 1 (Mirroring) RAID 0 (Striping)
	Logical RAID Volumes Supported	2
	Dimensions (excluding bracket)	6.6 x 2.5 x 0.6 in (16.8 x 6.4 x 1.6 cm)
	Disk Drive and Enclosure Protocol Support	3 Gbps SAS (Serial Attached SCSI) 1.5 Gbps SATA (Serial Advanced Technology Attachment)
	Architecture	64-bit
	SAS Connectors	1 internal SFF8484 x4 Wide SAS Connectors 12 Gbps per x4 Wide SAS Port (4 x 3 Gbps)
	Data Transfer Method	PCI-Express x8 - 2 GB/s maximum bandwidth
	PCI Bus Speed	PCI-Express x8
	Simultaneous Drive Transfer Ports	1 x4 Wide SAS Connectors
	Port Transfer Rate	12 Gb/s per x4 Wide SAS Port (4 x 3 Gb/s)
	Software upgradeable Firmware	Yes
	Maximum Capacity	1.2TB (4 x 300GB)
	Memory Addressing	64-bit, supporting servers memory greater than 4 GB
	Logical Drives Supported	Up to 2 Logical Volumes Up to 10 drives total in all RAID volumes Up to 2 Drives per RAID 1 Up to 4 Drives per RAID 0
	RAID Support	RAID 1 (Mirroring) RAID 0 (Striping)
	Upgradeable Firmware	4-MB flashable ROM
Disk Drive and Enclosure Protocol Support	3 Gbps SAS and 1.5 Gbps SATA	

Technical Specifications

HP SC40Ge SAS Host RAID Support	RAID 1 (Mirroring)
Bus Adapter with RAID	RAID 0 (Striping)
Logical Drives Supported	Up to 2 Logical Volumes
	Up to 10 drives total in all RAID volumes
	Up to 2 Drives per RAID 1
	Up to 8 Drives per RAID 0
Maximum Capacity	3.6TB (8 x 450GB)
Data Transfer Method	PCI-Express x8 - 2 GB/s maximum bandwidth
Port Transfer Rate	12 Gb/s per x4 Wide SAS Port (4 x 3 Gb/s)
Simultaneous Drive Transfer Ports	2 x4 Wide SAS Connectors
Protocols	3 Gbps SAS and 1.5 Gbps SATA
	1.5 Gbps SATA (Serial Advanced Technology Attachment)
External SAS Connectors	None
Internal SAS Connectors	2 internal SFF8484 x4 SAS Connectors
Upgradeable Firmware	4MB flashable ROM

Embedded NC105i PCI Network Interface	Integrated 10/100/1000BASE-T Transceiver
Gigabit Server Adapter	Combines a triple-speed IEEE 802.3TM – Compliant Media Access Controller (MAC) with a triple-speed Ethernet transceiver.
Data Transfer Method	Compliant to x1 PCIe Specification
Controller	BCM5722
Network Transfer Rate	10Base-T (Half-Duplex) 10 Mb/s
	10Base-T (Full-Duplex) 20 Mb/s
	100Base-TX (Half-Duplex) 100 Mb/s
	100Base-TX (Full-Duplex) 200 Mb/s
	1000Base-TX (Half and Full-Duplex) 2000Mb/s
Connector	RJ-45 connector
Cable Support	Performs all the physical layer functions for 10BASE-T, 100BASE-T, and 1000BASE-T Ethernet on standard Category 5 UTP

Technical Specifications

Environment-friendly Products and Approach and Recycling

End-of-life Management Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2010 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.