



# Start-up of a server in the node outside the cluster

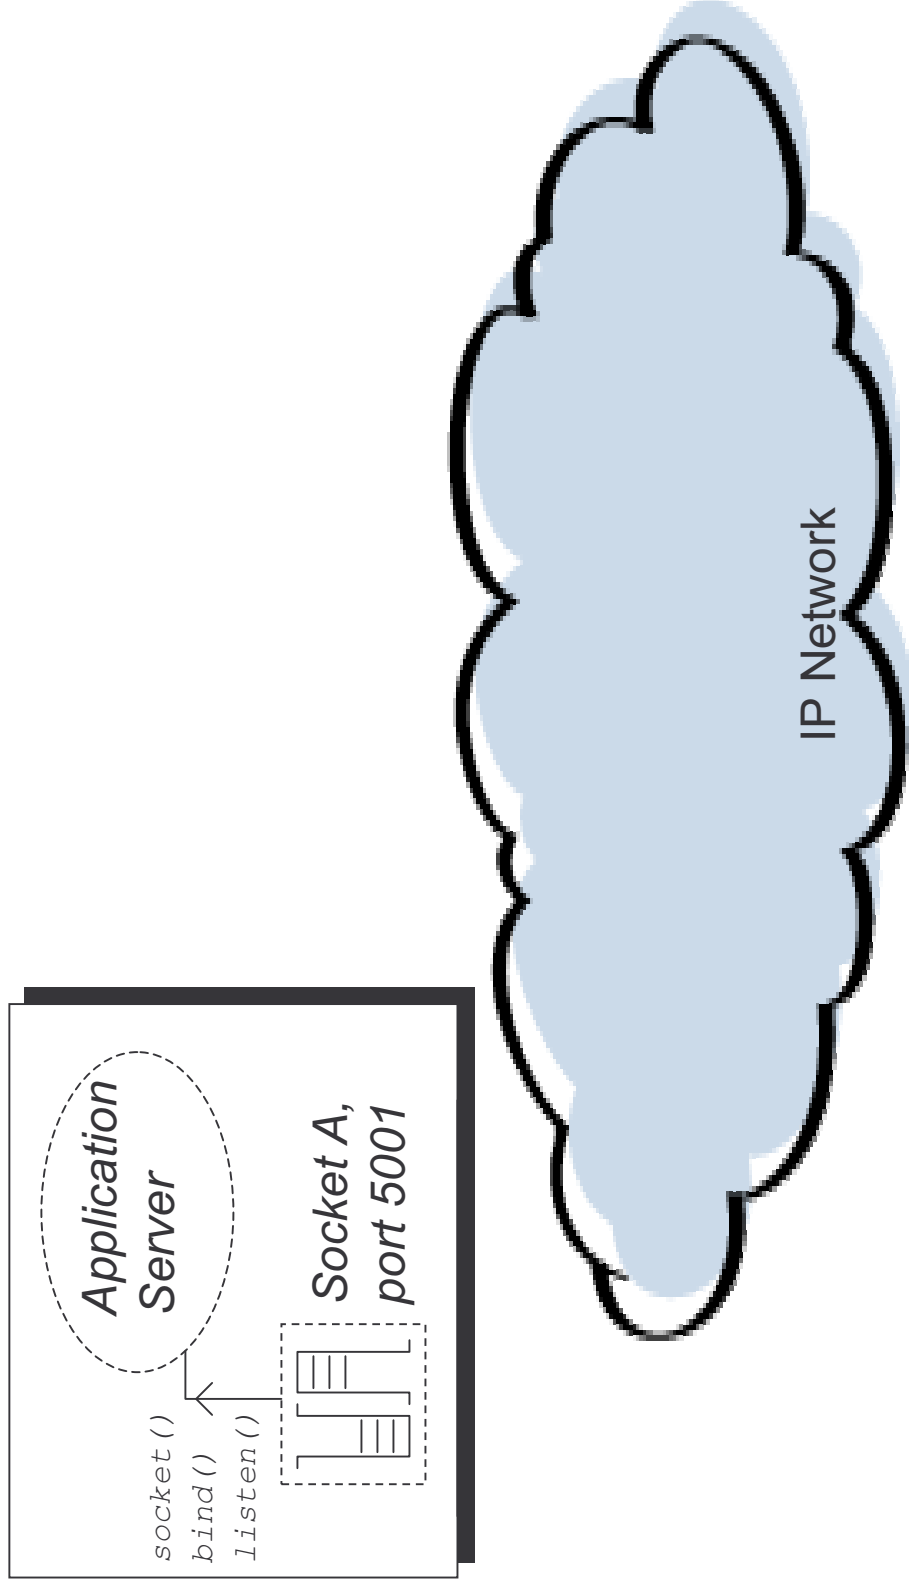

# A remote client asks for a service

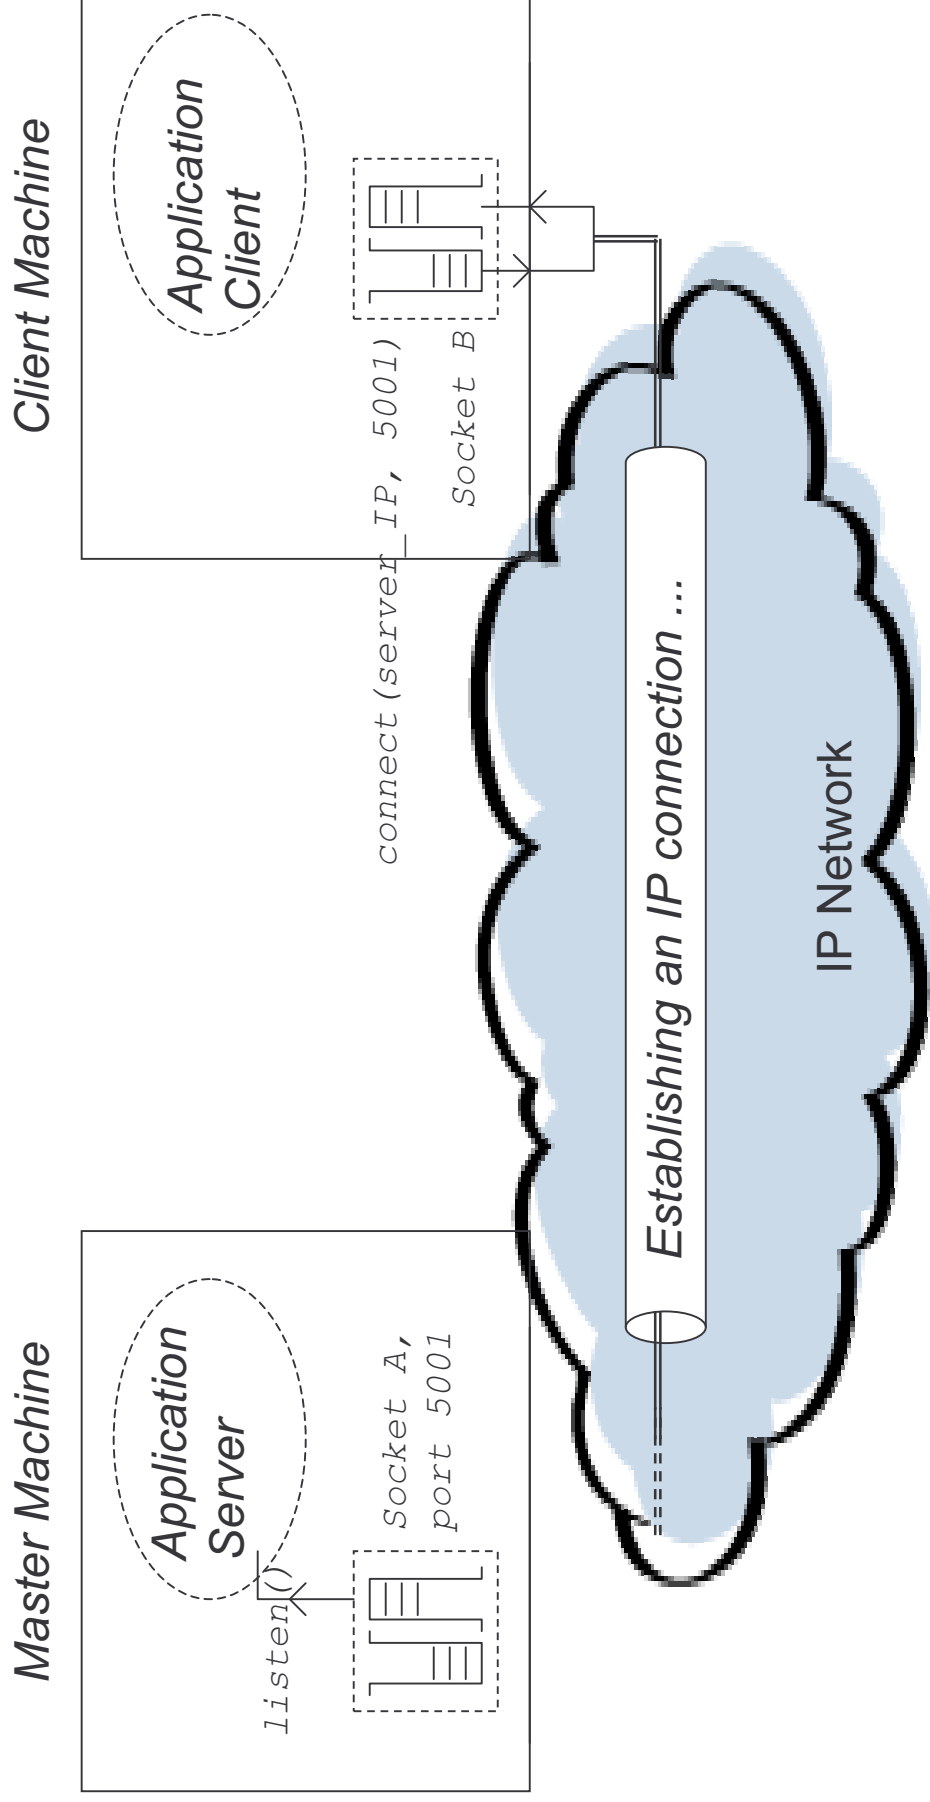

 Which is the IP address perceived by the master machine when it receives a service request by the client machine?

 Does this IP change when a MC/SG package is running on the client machine (which is part of a MC/SG cluster)?