



## Systems Insight Display LEDs

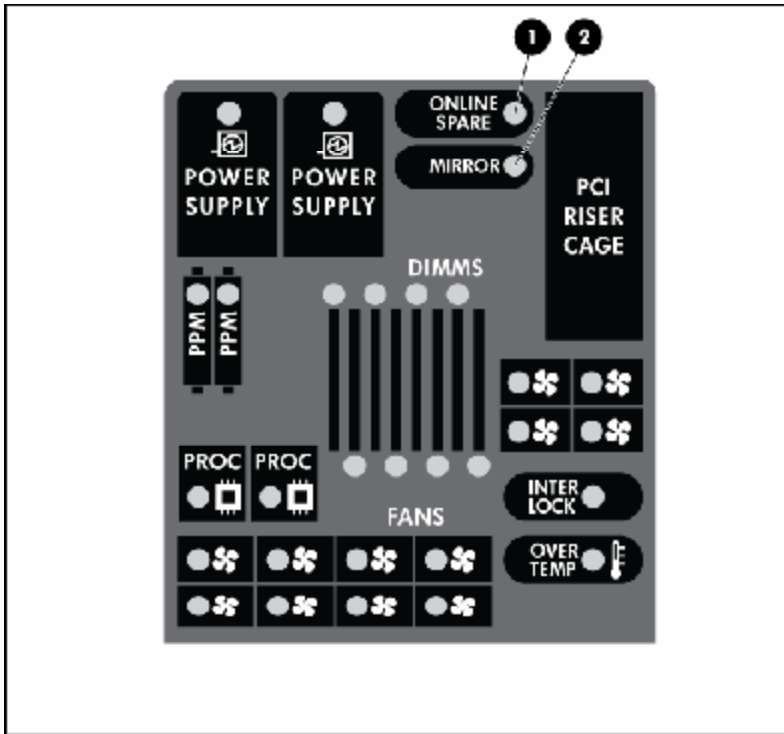

Item	Description	Status
1	Online spare	Off = No protection Green = Protection enabled Amber = Memory failure occurred Flashing amber = Memory configuration error
2	Mirror	Off = No protection Green = Protection enabled Amber = Memory failure occurred Flashing amber = Memory configuration error
	All other LEDs	Off = Normal Amber = Failure

**NOTE:** The HP Systems Insight Display LEDs represent the system board layout.

## Rear panel components

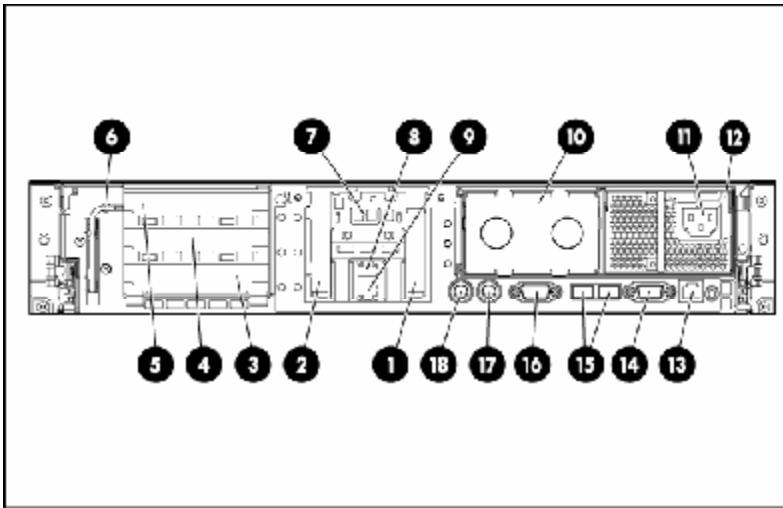

Item	Description	Color
1	Expansion slot 1	—
2	Expansion slot 2	—
3	Expansion slot 3	—
4	Expansion slot 4	—
5	Expansion slot 5	—
6	T-10/T-15 Torx screwdriver	—
7	External option blank	—
8	NIC 2 connector	—
9	NIC 1 connector	—
10	Power supply bay 2	—
11	Power cord connector	Black
12	Power supply bay 1 (populated)	—
13	iLO 2 connector	—
14	Video connector	Blue
15	USB connectors (2)	Black
16	Serial connector	—
17	Mouse connector	Green
18	Keyboard connector	Purple

## PCI expansion slot definitions

Item	PCIe	Mixed PCIe/PCI-X
1	x4, slot 1, bus A	x4, slot 1, bus A
2	x4, slot 2, bus B	x4, slot 2, bus B
3	x4, slot 3, bus C	x8, slot 3, bus C
4	x8, slot 4, bus D	64-bit/133-MHz, slot 4, bus D