

HP PROCURVE 5412ZL

```
hostname "HP_ProCurve_5412zl"  
max-vlans 32  
ip default-gateway 192.168.0.3  
ip routing  
vlan 1  
  name "DEFAULT_VLAN"  
  untagged A14,A16,A18,A20,A22,B15-B18,B20-B24,C14,C16,C18,C20-C21,C23,D17-D24,  
E13-E19,E21-E24  
  ip helper-address 192.168.0.2  
  ip address 192.168.0.3 255.255.255.0  
  tagged E20  
  no untagged A1-A13,A15,A17,A19,A21,A23-A24,B1-B14,B19,C1-C13,C15,C17,C19,C22,  
C24-D16,E1-E12  
  exit  
vlan 5  
  name "GREEN"  
  untagged A23-A24  
  ip helper-address 192.168.0.2  
  ip address 192.168.5.254 255.255.255.0  
  tagged E20  
  exit  
vlan 32  
  name "MngNet"  
  ip address 192.168.32.254 255.255.255.0  
  tagged E20  
  exit  
ip route 0.0.0.0 0.0.0.0 192.168.0.1  
router rip  
  default-metric 4  
  exit  
vlan 1  
  ip rip 192.168.0.3  
  exit  
vlan 5  
  ip rip 192.168.5.254  
  exit  
vlan 32  
  ip rip 192.168.32.254  
  exit
```

HP V1910

```
<HP V1910 Switch>display current-configuration  
version 5.20 Release 1111P02  
sysname HP V1910 Switch
```

```
vlan 1  
description Default VLAN  
vlan 5  
description GREEN  
vlan 32
```

description MngNet

interface Vlan-interface1

ip address 192.168.0.253 255.255.255.0

interface GigabitEthernet1/0/1

port link-type hybrid
port hybrid vlan 1 5 32 tagged
port hybrid pvid vlan 32
poE enable
stp edged-port enable

interface GigabitEthernet1/0/2

port link-type hybrid
port hybrid vlan 1 untagged

interface GigabitEthernet1/0/3

port link-type hybrid
port hybrid vlan 1 untagged

interface GigabitEthernet1/0/4

port link-type hybrid
port hybrid vlan 1 untagged

interface GigabitEthernet1/0/5

port link-type hybrid
port hybrid vlan 1 untagged

interface GigabitEthernet1/0/6

port link-type hybrid
port hybrid vlan 1 untagged

interface GigabitEthernet1/0/7

port link-type hybrid
port hybrid vlan 1 untagged

poE enable

stp edged-port enable

interface GigabitEthernet1/0/8

port link-type hybrid
port hybrid vlan 1 untagged

interface GigabitEthernet1/0/9

port link-type hybrid
port hybrid vlan 1 untagged

interface GigabitEthernet1/0/10

port link-type hybrid
port hybrid vlan 1 untagged

interface GigabitEthernet1/0/11

port link-type hybrid
port hybrid vlan 1 untagged

interface GigabitEthernet1/0/12

port link-type hybrid
port hybrid vlan 1 untagged

interface GigabitEthernet1/0/13

port link-type hybrid
port hybrid vlan 1 untagged

interface GigabitEthernet1/0/14

port link-type hybrid
port hybrid vlan 1 untagged

```
interface GigabitEthernet1/0/15
port link-type hybrid
port hybrid vlan 1 untagged
interface GigabitEthernet1/0/16
port link-type hybrid
port hybrid vlan 1 untagged
```

```
interface GigabitEthernet1/0/17
port link-type hybrid
undo port hybrid vlan 1
port hybrid vlan 5 untagged
interface GigabitEthernet1/0/18
port link-type hybrid
undo port hybrid vlan 1
port hybrid vlan 5 untagged
interface GigabitEthernet1/0/19
port link-type hybrid
undo port hybrid vlan 1
port hybrid vlan 5 untagged
interface GigabitEthernet1/0/20
port link-type hybrid
undo port hybrid vlan 1
port hybrid vlan 5 untagged
stp edged-port enable
interface GigabitEthernet1/0/21
port link-type hybrid
undo port hybrid vlan 1
port hybrid vlan 5 untagged
interface GigabitEthernet1/0/22
port link-type hybrid
undo port hybrid vlan 1
port hybrid vlan 5 untagged
interface GigabitEthernet1/0/23
port link-type hybrid
undo port hybrid vlan 1
port hybrid vlan 5 untagged
interface GigabitEthernet1/0/24
port link-type hybrid
undo port hybrid vlan 1
port hybrid vlan 5 untagged
```

```
interface GigabitEthernet1/0/25
port link-type hybrid
port hybrid vlan 1 untagged
interface GigabitEthernet1/0/26
port link-type hybrid
port hybrid vlan 1 untagged
interface GigabitEthernet1/0/27
port link-type hybrid
port hybrid vlan 1 untagged
interface GigabitEthernet1/0/28
port link-type hybrid
port hybrid vlan 1 untagged
```

```
ip route-static 0.0.0.0 0.0.0.0 192.168.0.3
snmp-agent
snmp-agent local-engineid
snmp-agent community read public
snmp-agent community write private
snmp-agent sys-info location Not sure yet
snmp-agent sys-info version all
dhcp enable
ntp-service source-interface Vlan-interface1
user-interface aux 0
authentication-mode scheme
user-interface vty 0 15
authentication-mode scheme
```

<HP V1910 Switch> display vlan all

VLAN ID: 1

VLAN Type: static
Route Interface: configured
IP Address: 192.168.0.253
Subnet Mask: 255.255.255.0
Description: Default VLAN
Name: VLAN 0001

Tagged Ports:

GigabitEthernet1/0/1

Untagged Ports:

GigabitEthernet1/0/2 GigabitEthernet1/0/3 GigabitEthernet1/0/4
GigabitEthernet1/0/5 GigabitEthernet1/0/6 GigabitEthernet1/0/7
GigabitEthernet1/0/8 GigabitEthernet1/0/9 GigabitEthernet1/0/10
GigabitEthernet1/0/11 GigabitEthernet1/0/12 GigabitEthernet1/0/13
GigabitEthernet1/0/14 GigabitEthernet1/0/15 GigabitEthernet1/0/16
GigabitEthernet1/0/25 GigabitEthernet1/0/26 GigabitEthernet1/0/27
GigabitEthernet1/0/28

VLAN ID: 5

VLAN Type: static
Route Interface: not configured
Description: GREEN
Name: VLAN 0005

Tagged Ports:

GigabitEthernet1/0/1

Untagged Ports:

GigabitEthernet1/0/17 GigabitEthernet1/0/18 GigabitEthernet1/0/19
GigabitEthernet1/0/20 GigabitEthernet1/0/21 GigabitEthernet1/0/22
GigabitEthernet1/0/23 GigabitEthernet1/0/24


VLAN ID: 32

VLAN Type: static
Route Interface: not configured
Description: MngNet
Name: VLAN 0032

Tagged Ports:

GigabitEthernet1/0/1

Untagged Ports: none

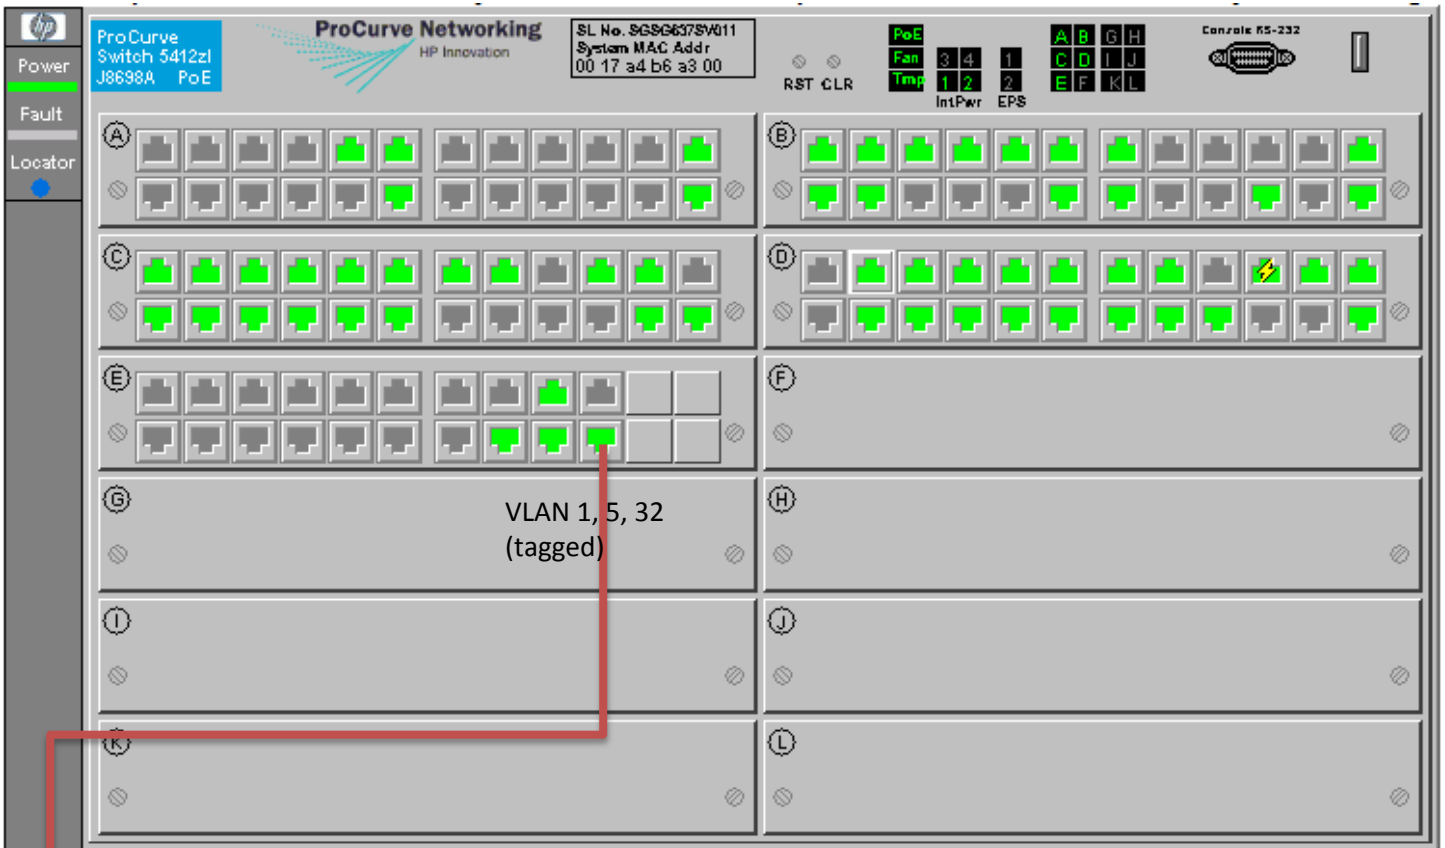

VLAN 1, 5, 32 (tagged)



VLAN 1 (untagged)

VLAN 5 (untagged)